



1.0/2.3 STRAIGHT PCB BULKHEAD JACK 75 OHM 52-454-1-D36

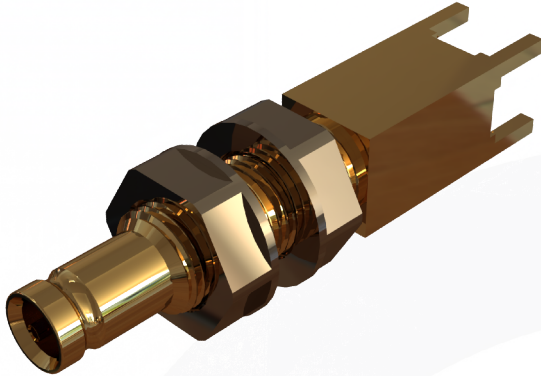

images for illustration purposes only

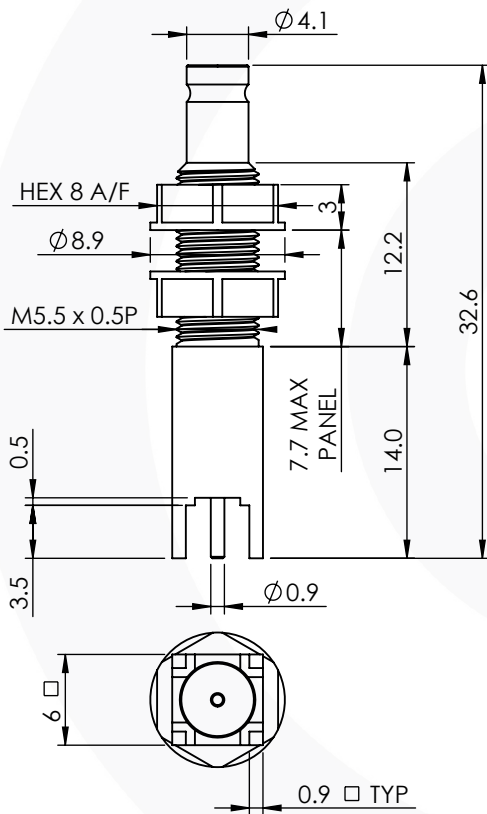

Environmental Specification

Operating Temp: -55 to +155 Deg C.
IP Rating (Mated): N/A

Electrical Specification Mechanical Specification

Impedance: 75 Ohm Contact Retention: 10 N min
Frequency: 0-6 GHz Cable Retention: N/A
Dielectric W/V: 750 Veff Mating cycles: 500
Insulation res: 1000 M-Ohm Weight: 5.18 g

Connector Interface






image for illustration purposes only

Recommended Mounting



Recommended PCB Layout

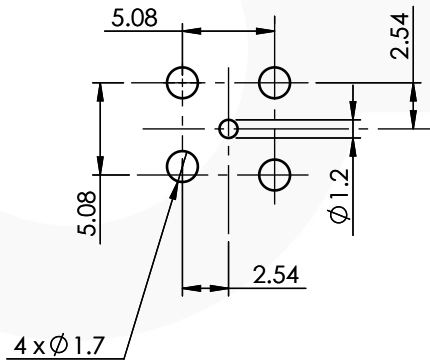

4	NUT	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BeCu	GOLD
1	BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES			
REVISION :	A00		NAME	SIGNATURE	DATE
DRAWN :	1		G.E.		07/05/2024
ISSUE :			P.S.		07/02/2013
APPV'D :					
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		<small>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</small>			