




2.92(K) SURFACE MOUNT JACK 30K-453-D3

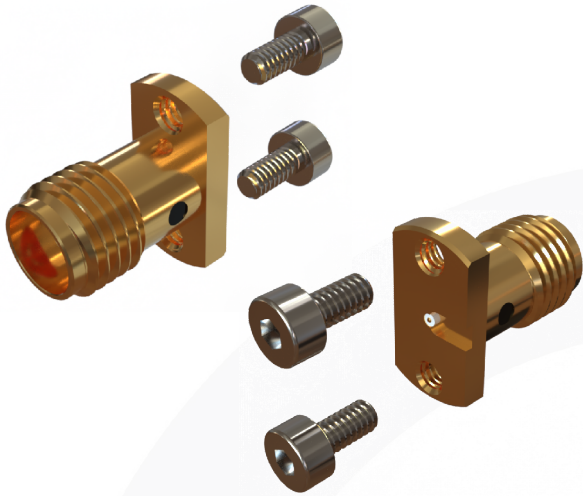

images for illustration purposes only

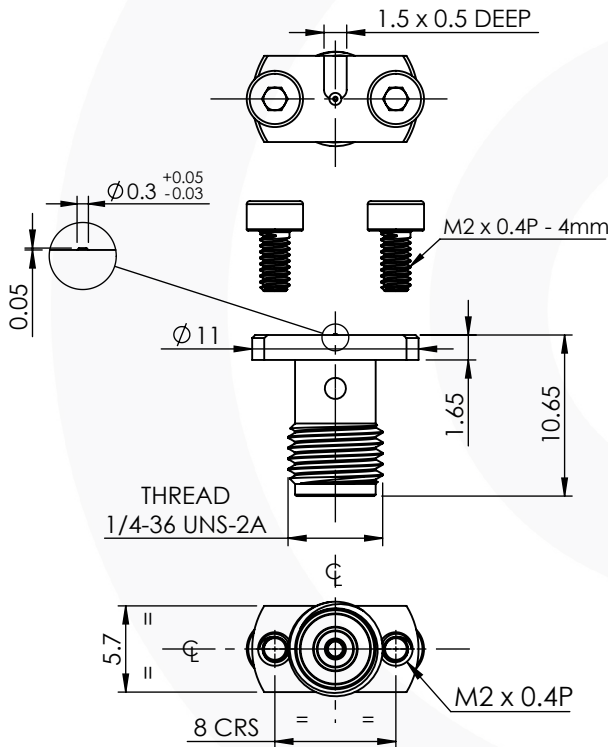

Recommended Mounting



Environmental Specification

Operating Temp: -30 to +70 Deg C.

IP Rating (Mated): IP 40

Electrical Specification

Impedance: 50 Ohm

Frequency: 0-40 GHz

Dielectric W/V: 750 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 19 N min


Cable Retention: Not Applicable

Mating cycles: 250

Weight: 2.45 g

Connector Interface

image for illustration purposes only



5	RETENTION ADHESIVE	EPOXY	N/A
4	CAP HEAD SCREW	STAINLESS STEEL	PASSIVATED
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	20/08/2024
		CHK'D	P.S.	20/08/2024
		APPV'D		
<p>6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR</p> <p>THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.</p>				