



## 2.92 (K) EASYFIT / SOLDER - CLAMP JACK

### 30K-081-HP3-HA

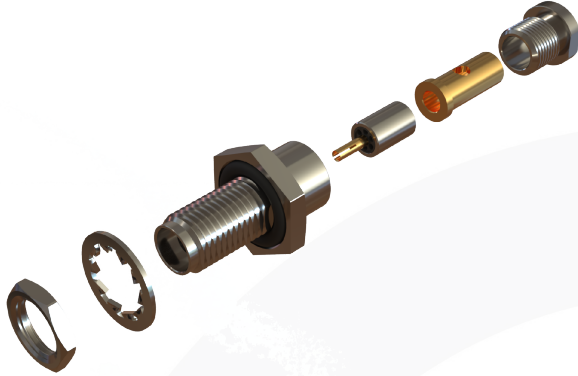


images for illustration purposes only

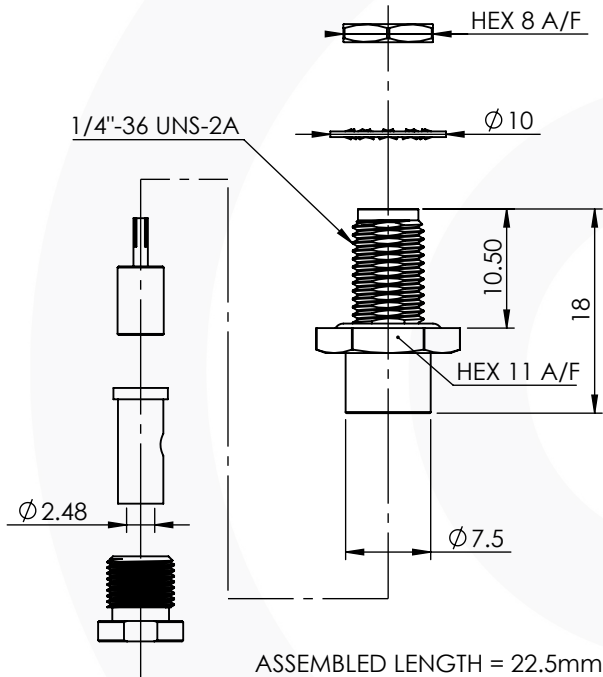

#### Suitable for Cables:

(HA) RG405 (0.085"), UT85

#### Stripping Dimensions



a = 2.0 mm

#### Assembly Procedure: Not Applicable

#### Tooling

Centre Contact: Not Applicable

Tool No: Not Applicable

Crimp Sleeve: Solder

Tool No: Solder

Alignment Tool: Not Applicable

Extraction: Not Applicable

#### Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 65

#### Electrical Specification

Impedance: 50 Ohm

Frequency: 0- 40 GHz

Dielectric W/V: 1000 Veff

Insulation res: 5000 M-Ohm

#### Mechanical Specification

Contact Retention: 27 N min


Cable Retention: 100 N min

Mating cycles: 250


Weight: 5.68 g

#### Connector Interface

image for illustration purposes only



#### Mounting Details

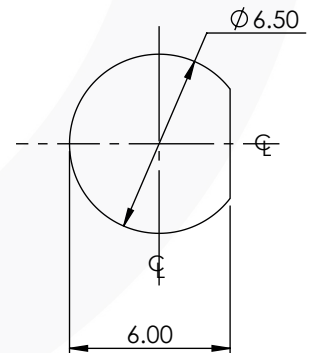

7	WASHERS	STAINLESS STEEL	PASSIVATED
6	NUT	STAINLESS STEEL	PASSIVATED
5	GASKET	SILICONE	N/A
4	SOLDER FERRULE	BRASS	GOLD
3	INSULATOR	PPO	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	STAINLESS STEEL	PASSIVATED
ITEM	DESCRIPTION	MATERIAL	PLATING

A4

SHEET 1 OF 1

DIMENSIONS ARE IN MILLIMETRES

REVISION : A01

NAME SIGNATURE DATE

ISSUE : 1

DRAWN G.E. 22/07/2025  
CHK'D P.S. 22/07/2025

6-8 COLNE ROAD,  
TWICKENHAM,  
MIDDLESEX.  
TW1 4JR

APPV'D  
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS  
SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL  
GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT  
TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR  
NOTICE.