


N TYPE PLUG TO TNC PLUG ADAPTOR

74-1325-514



images for illustration purposes only

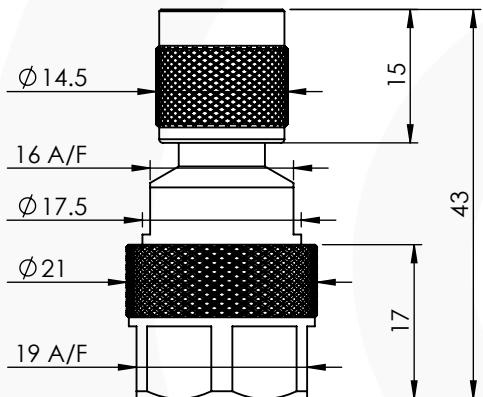

© 2023. THIS DOCUMENT IS THE PROPERTY OF COAX CONNECTORS LTD. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

ITEM	DESCRIPTION	MATERIAL	PLATING
10	LOCKING RING	PHOSPHOR BRONZE	NICKEL
9	WASHER	BRASS	NICKEL
8	N TYPE COUPLING NUT	BRASS	NICKEL
7	SPACER	DELRIN	N/A
6	TNC COUPLING NUT	BRASS	NICKEL
5	GASKETS	SILICONE	N/A
4	OUTER CONTACT	BRASS	NICKEL
3	INSULATORS	PTFE	N/A
2	CENTRE CONTACT	PHOSPHOR BRONZE	GOLD
1	BODY	BRASS	NICKEL

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	04/12/2025
		CHK'D	P.S.	04/12/2025
		APPV'D		

**6-8 COLNE ROAD,
TWICKENHAM,
MIDDLESEX.
TW1 4JR**

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.

Environmental Specification

Operating Temp: -30 to +70 Deg C.

IP Rating (Mated): IP 55

Electrical Specification

Impedance: 50 Ohm

Frequency: 0-4 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 27 N min

Cable Retention: Not Applicable

Mating cycles: 500

Weight: 49.23 g

Connector Interface

image for illustration purposes only

