




MICRO BNC INTERNALLY SEALED BULKHEAD PCB JACK 67-454-4-D66

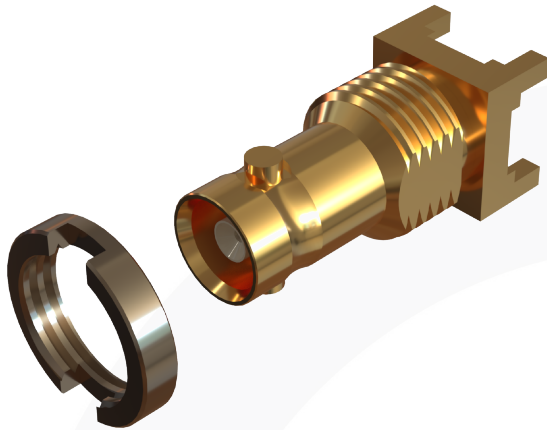

images for illustration purposes only

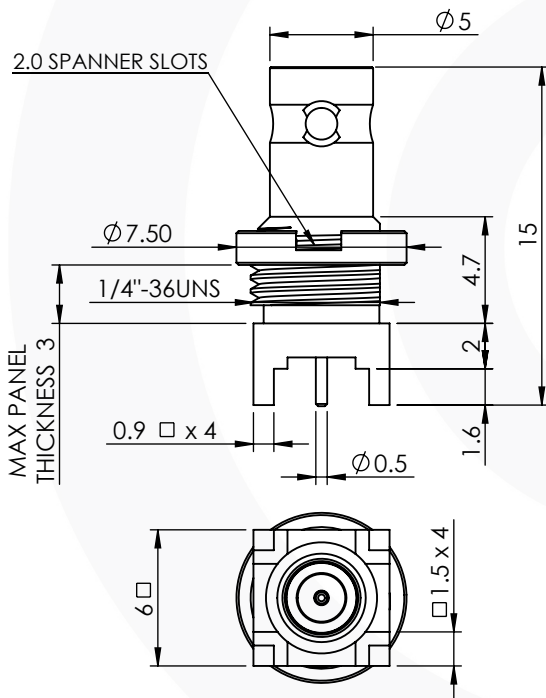

Recommended PCB Layout

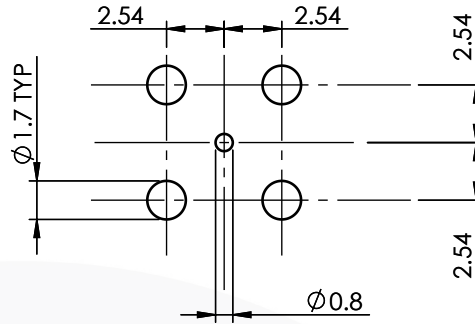

Tooling

Centre Contact: Not Applicable Tool No: Not Applicable
Crimp Sleeve: Not Applicable Tool No: Not Applicable
Castellated Nut Spanner: 96-1135

Environmental Specification

Operating Temp: -55 to +155 Deg C.
IP Rating: IP 68 (Internally Un-mated)

Electrical Specification


Impedance: 75 Ohm
Frequency: 0-12 GHz
Dielectric W/V: 1000 Veff
Insulation res: 1000 M-Ohm

Mechanical Specification


Contact Retention: 15 N min
Cable Retention: N/A N min
Mating cycles: 500
Weight: 1.81 g

Connector Interface

image for illustration purposes only



Recommended Mounting Hole



5	NUT	BRASS	NICKEL
4	GASKETS	SILICONE	N/A
3	INSULATORS	PTFE	N/A
2	CENTRE CONTACT	BeCu	GOLD
1	BODY	BRASS	GOLD

ITEM	DESCRIPTION	MATERIAL	PLATING
A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
REVISION :	A00	NAME	SIGNATURE
ISSUE :	1	DATE	
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		APPV'D	



THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.

Model File: C:\Fusion Components Ltd\CAD Data\Solid Models\7 - Match IT SERIES\TOP LEVEL\MICRO BNC 11297