
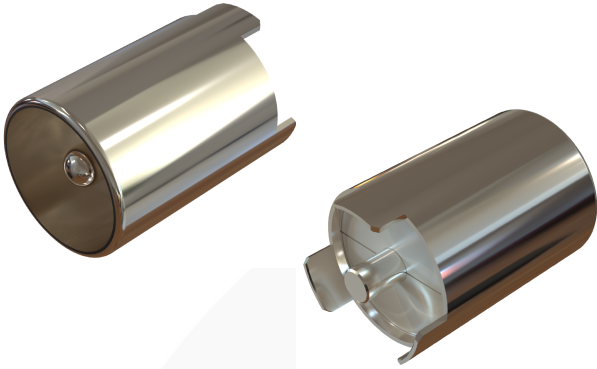
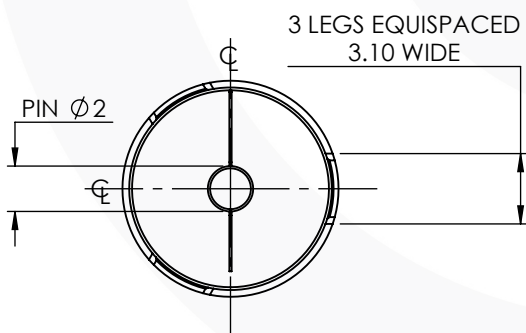
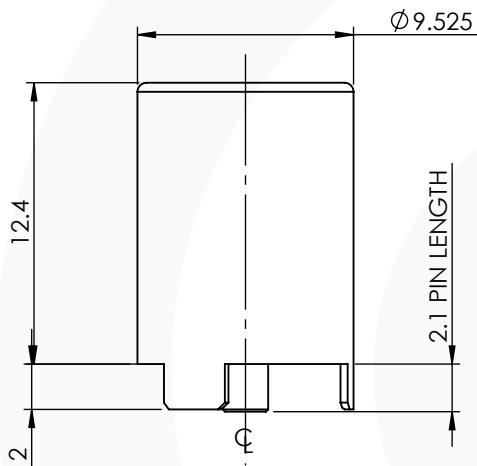


TYPE 9.52 PCB MOUNTED
JACK

78-451-Sn

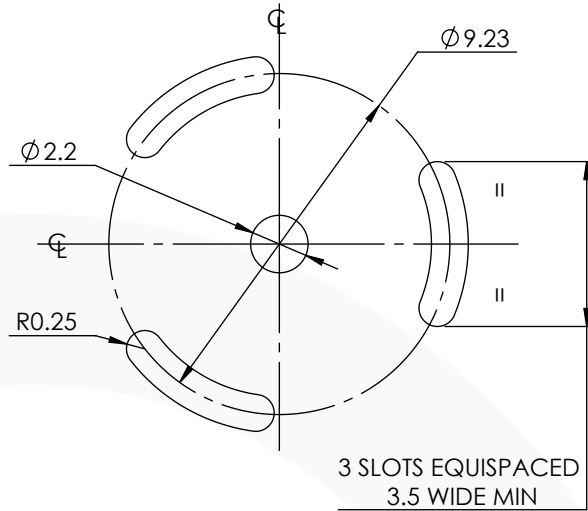

images for illustration purposes only

RECOMMENDED MOUNTING:Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): Not Applicable

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-3 GHz

Dielectric W/V: 750 Veff

Insulation res: 1000 M-Ohm

Mechanical Specification

Contact Retention: 30 N min


Cable Retention: N/A

Mating cycles: 500

Weight: 2.18 g

Connector Interface

image for illustration purposes only



3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BRASS	TIN
1	BODY	BRASS	TIN
ITEM	DESCRIPTION	MATERIAL	PLATING

A4

SHEET 1 OF 1

DIMENSIONS ARE IN MILLIMETRES

REVISION : A00

ISSUE : 1

6-8 COLNE ROAD,
TWICKENHAM,
MIDDLESEX.
TW1 4JR

NAME	SIGNATURE	DATE
DRAWN	G.E.	29/06/2026
CHK'D	P.S.	29/06/2026
APPV'D		

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.