


N TYPE JACK BULKHEAD R/A PCB MOUNT

25-465-1-B3




images for illustration purposes only

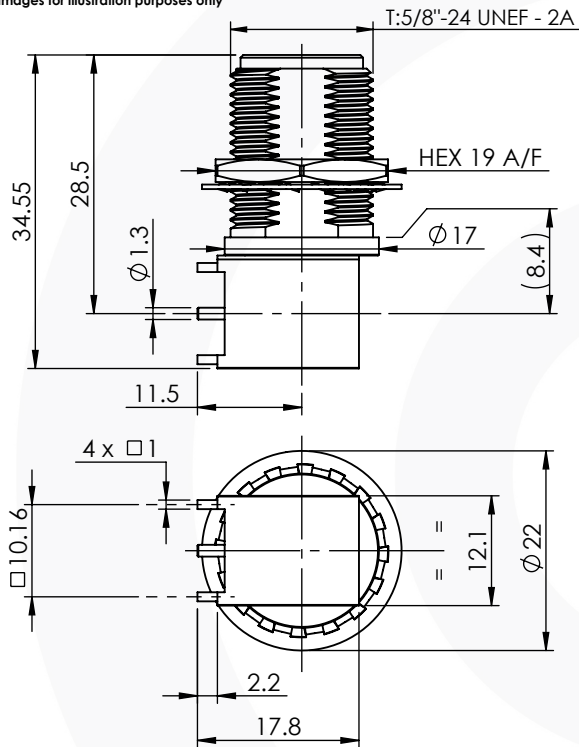


MAXIMUM PANEL THICKNESS = 3.2mm

RECOMMENDED PCB MOUNTING



RECOMMENDED MOUNTING HOLE



Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 40

Electrical Specification

Impedance: 50 Ohm

Frequency: 0-3 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 27 N min


Cable Retention: N/A N min

Mating cycles: 500

Weight: 45.47 g

Connector Interface

image for illustration purposes only



6	WASHER	PHOSPHOR BRONZE	NICKEL
5	NUT	BRASS	NICKEL
4	PCB CONTACT	BRASS	GOLD
3	INSULATORS	PTFE	N/A
2	CENTRE CONTACT	PHOSPHOR BRONZE	GOLD
1	BODIES	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	09/09/2026
		CHK'D	P.S.	09/09/2026
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				