



N TYPE STRAIGHT EASYFIT/CLAMP JACK LCF12-50 25-067-R3-RD

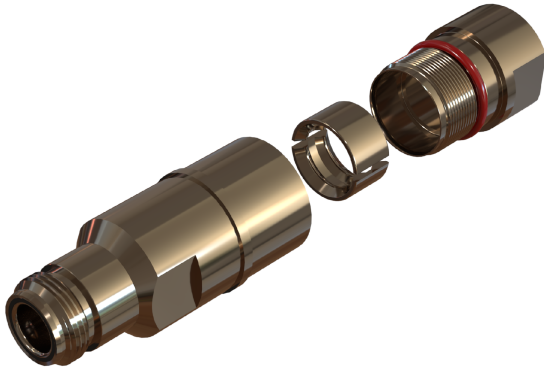


images for illustration purposes only

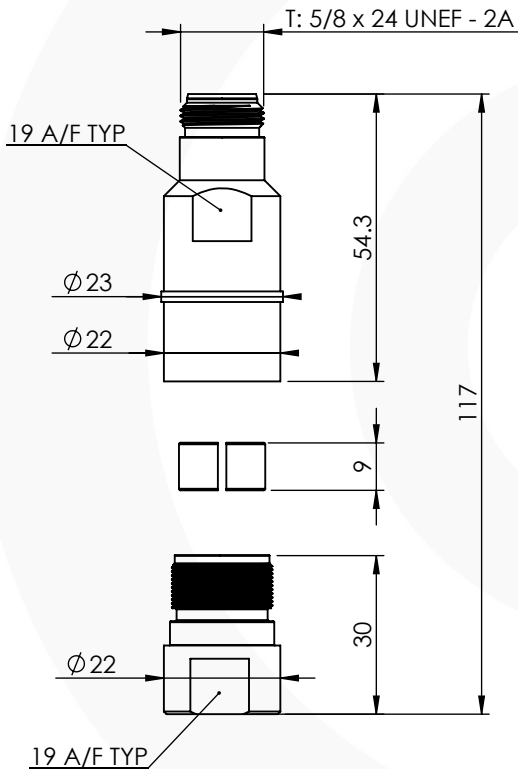

Suitable for Cables:

(RD) LCF12-50J

Stripping Dimensions



NOTE: DIMENSIONS a & b ARE FROM THE CENTRE OF A RIDGE ON THE OUTER CONDUCTOR

a = 7.0 mm
b = 45.0 mm
c = 50.0 mm

Assembly Procedure: AP028

Environmental Specification

Operating Temp: -55 to +155 Deg C

IP Rating (Mated): IP 65

Electrical Specification

Impedance: 50 Ohm

Frequency: 0 - 3 GHz

Dielectric W/V: CABLE DEPENDANT

Insulation res: CABLE DEPENDANT

Mechanical Specification

Contact Retention: 27 N min


Cable Retention: 400 N min

Mating cycles: 500

Weight: 117.37 g

Connector Interface

image for illustration purposes only



5	O-RING SEAL	SILICONE	N/A
4	INNER CLAMP	BRASS	WHITE BRONZE
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BeCu	WHITE BRONZE
1	BODY & REAR NUT	BRASS	WHITE BRONZE
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	GE	22/09/2026
		CHK'D	P.S.	22/09/2026
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.		