



BNC STRAIGHT CRIMP/CRIMP JACK 10-054-D126-FC1

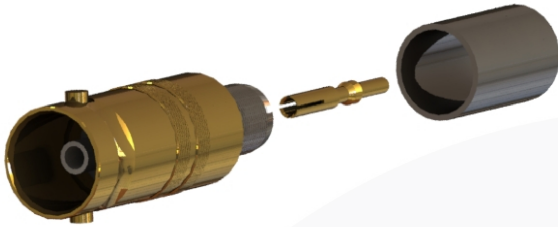


images for illustration purposes only

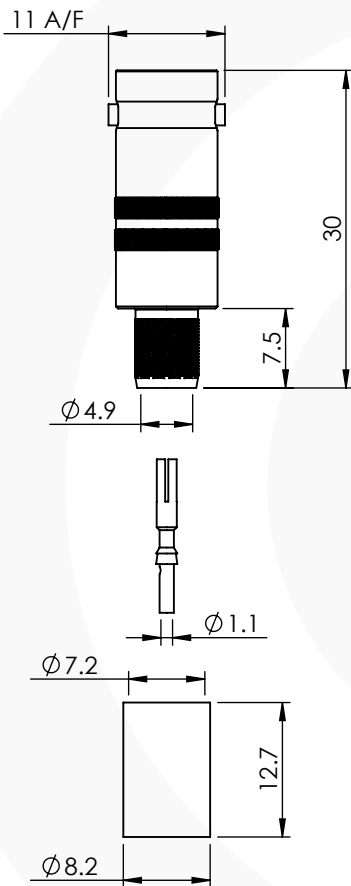

Suitable for Cables:

(FC) Belden 1694A, Belden 1694F, Draka 1.0/4.8 A/F, Bryant BD SD11, Image 1000, Condufil 13653, Percon VK7, VK77

Stripping Dimensions



a = 5.0 [0.1969"] mm
b = 7.5 [0.2953"] mm
c = 17.0 [0.6693"] mm
d = 12.0 [0.4724"] mm

* CUT FOIL TO DIM. "b"

Assembly Procedure: AP001

Tooling

Centre Contact: SQ 1.07mm [0.0421"] A/F Tool No: 96-HTS-77

Crimp Sleeve: Hex 7.06mm [0.278"] A/F Tool No: 96-HTS-77

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 64

Electrical Specification

Impedance: 75 Ohm

Frequency: 0-12 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: 150 N min

Mating cycles: 500

Weight: 9.14 g

Connector Interface

image for illustration purposes only



5	REAR BODY	BRASS	NICKEL
4	FEMALE CONTACT	PHOSPHOR BRONZE	GOLD
3	CRIMP SLEEVE	BRASS	NICKEL
2	INSULATOR	PTFE	N/A
1	BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	B.S.	08/02/2018
		CHK'D	I.G.	30/04/2018
		APP'V'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				