

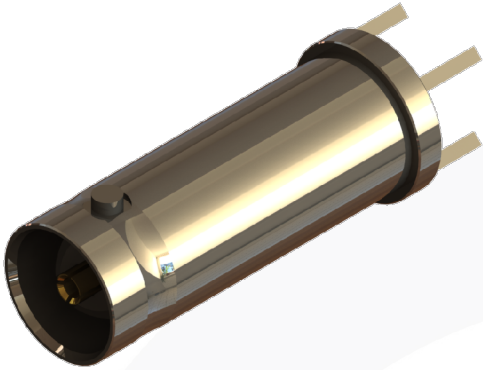


BNC VERTICAL PCB MOUNT JACK


10-452-A6

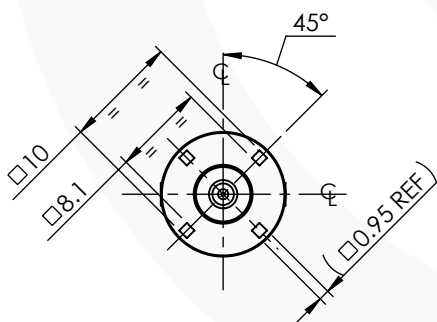

images for illustration purposes only

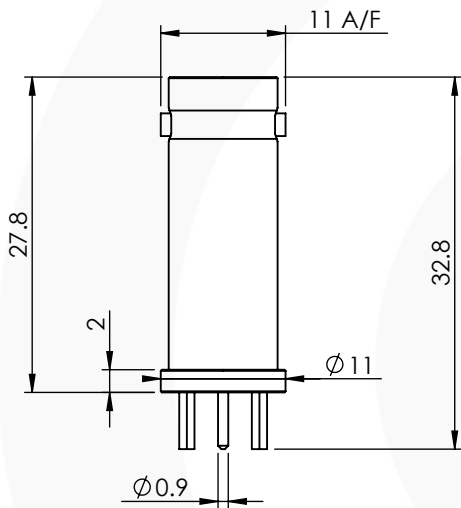

Recommended PCB Layout

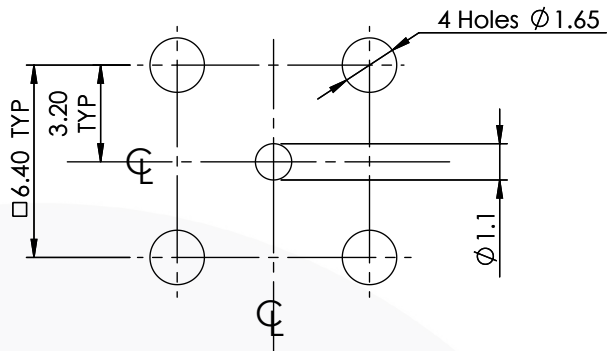

Environmental Specification

Operating Temp: -30 to +82 Deg C.
IP Rating (Mated): NONE

Electrical Specification


Impedance: 75 Ohm
Frequency: 0-1 GHz
Dielectric W/V: 1500 Veff
Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min
Cable Retention: Not Applicable
Mating cycles: 500
Weight: 10.46 g

Connector Interface

image for illustration purposes only



3	INSULATOR	POM	N/A
2	CENTRE CONTACT	PHOSPHOR BRONZE	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	G.E.	06/05/2022
		CHK'D	P.S.	06/05/2022
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				