

PRODUCT DATASHEET

BNC STRAIGHT PCB JACK (3 Legs 75 ohm)


10-486-D126

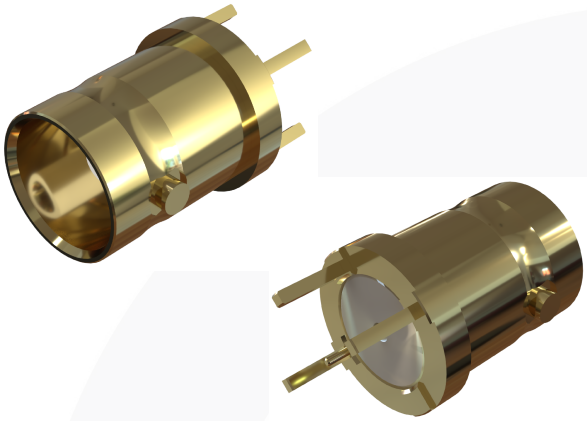

images for illustration purposes only

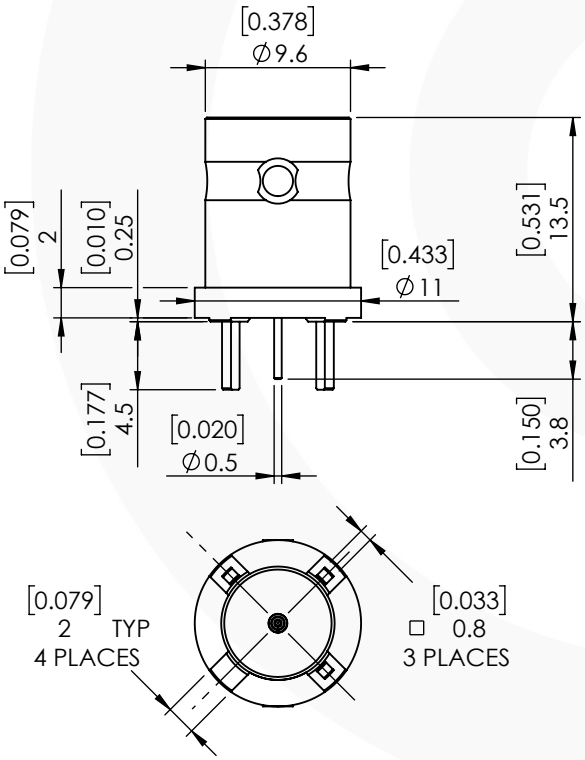

Recommended PCB Hole Layout

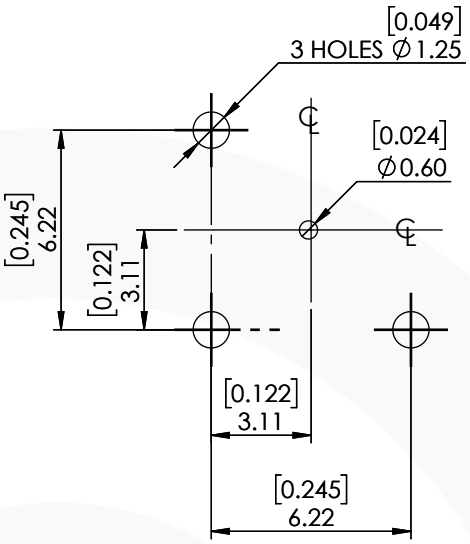

Environmental Specification

Operating Temp: NONE

IP Rating (Mated): -55 to +155 Deg C.

Electrical Specification

Impedance: 75 Ohm

Frequency: 0 - 12 GHz*

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min

Cable Retention: Not Applicable


Mating cycles: 500

Weight: 3.46 g

* Designed to meet SMPTE 2082 specification.

Connector Interface

image for illustration purposes only



ITEM	DESCRIPTION	MATERIAL	PLATING
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	GOLD

A4	SHEET 1 OF 1
REVISION :	A00
ISSUE :	1

RoHS 2002/95/EC

DIMENSIONS ARE IN MILLIMETRES

	NAME	SIGNATURE	DATE
DRAWN	G.E.		12/11/2026
CHK'D	P.S.		12/11/2026
APPV'D			

6-8 COLNE ROAD,
TWICKENHAM,
MIDDLESEX.
TW1 4JR

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS,WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.

© 2013. THIS DOCUMENT IS THE PROPERTY OF COAX CONNECTORS LTD. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

Tel: +44(0)20 8538 9090 Fax: +44(0)20 8538 9890 Email: info@coax-connectors.com

Model File: C:\Fusion Components Ltd\CAD Data\Solid Models\Z - Match IT SERIES\TOP LEVEL\BNC 11328

Cad File: C:\Fusion Components Ltd\CAD Data\Drawings\Z - Match IT SERIES\DATA SHEETS\10-486-D126